


# Concrete pump

Output up to 20 m<sup>3</sup>/h  
 Delivery pressure up to 75 bar


# BSA 1002 SV -D

# BSA 1002 SV -E

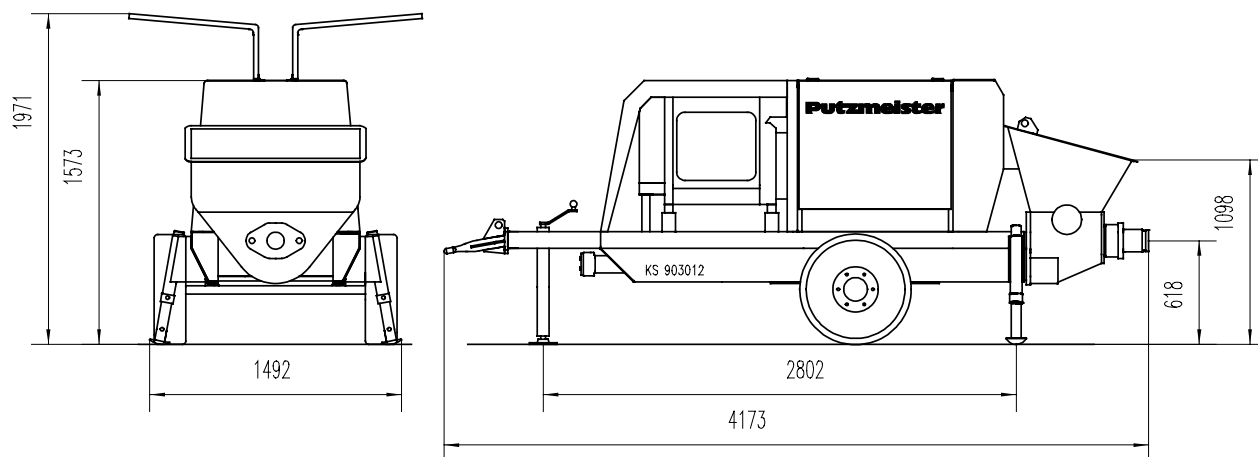

Note: Standard version. Dimensions and weights depend on equipment.

### Performance diagram

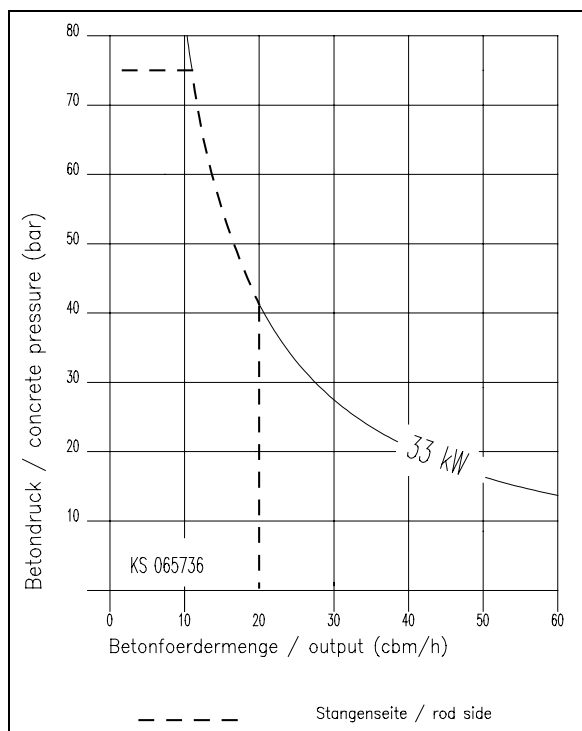

### Technical data for concrete pump


Model	BSA 1002 SV -D		BSA 1002 SV -E
Material number	100550.007		100593.006
Output	m <sup>3</sup> /h	20	
Delivery pressure	bar	75	
Delivery cylinder	Ø mm	120	
Delivery cyl. stroke	mm	1000	
Strokes / minute		30	
Engine / motor power	kW	33	30 *
Hopper		TS 300	
Capacity	l	approx. 230	
Filling height	m	approx. 1.1	
Transfer tube		S 1210	
Press. connection		4.5"	
Control system		fully hydraulic control double circuit (VHSZ)	
Weight	kg	2500	

\* Electric motor with 50 Hz.

All data maximum theoretical

Alterations due to technical progress reserved.  
 Please see quotation for exact serial delivery scope.

## Hopper with transfer tube

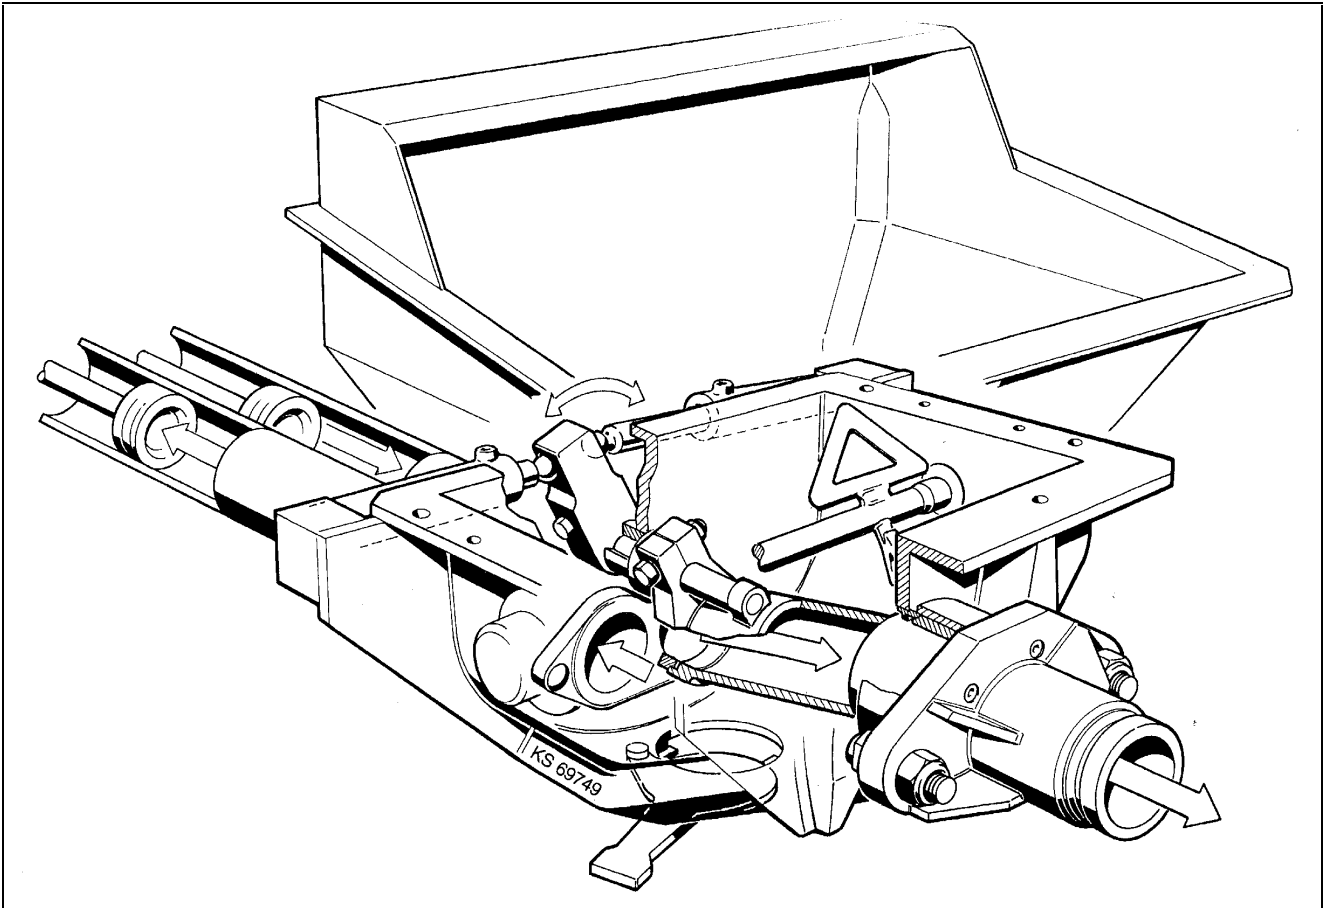

### Delivery scope

- accelerate dosage pump assembly prepared
- CE-Kit with agitator safety switch off
- central lubrication strip hopper
- cleaning accessories
- concrete hopper with agitator
- coupling ring (DIN)
- drive diesel, Hatz 33 KW (BSA 1002 SV -D)
- drive electric 30 KW (BSA 1002 SV -E)
- grill 30 mm
- operating manuals 2x cert. and spare part lists
- painting: MB 1227 chrome yellow
- set of tools
- sound proofed version (CEN) < 80 dBA
- splash guard
- support legs 3x mechan.
- trailer F 8, can be driven on job site

### Optional extras

On request