


# Concrete pump


# BSA 1407 -D

Output up to 71 m<sup>3</sup>/h  
 Delivery pressure up to 106 bar

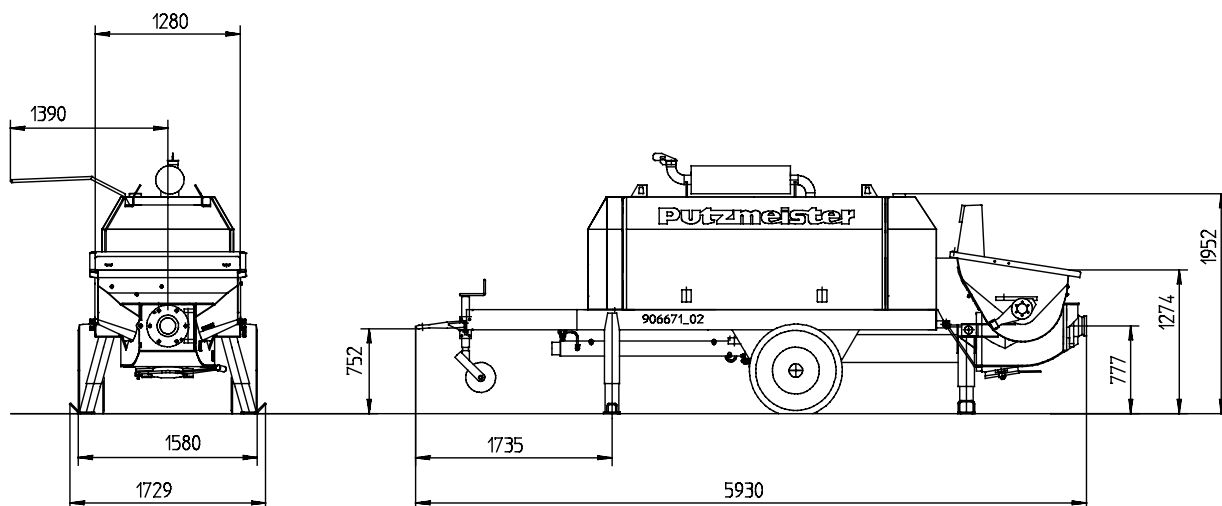

Note: Standard version. Dimensions and weights depend on equipment.

## Performance diagram

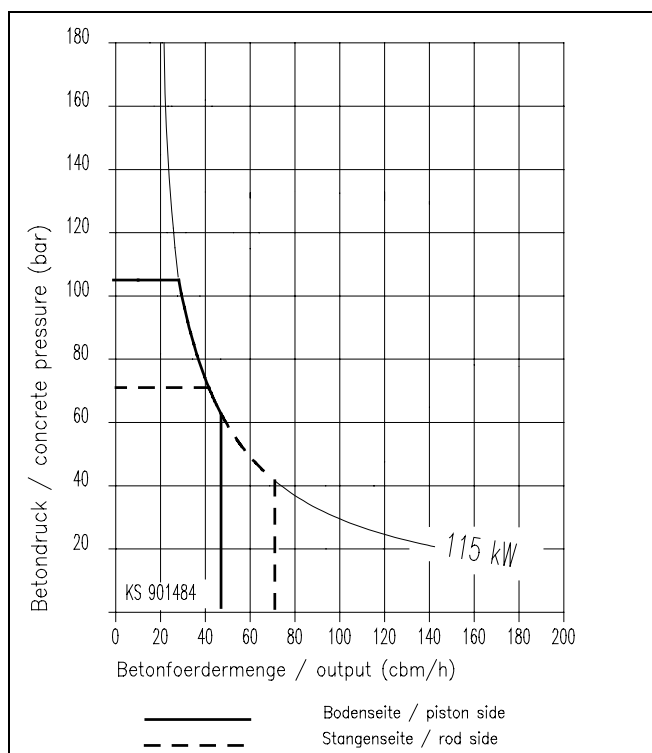

## Technical data for concrete pump


Model		BSA 1407 -D
Material number		101120.009
Output	m <sup>3</sup> /h	71 / 47 *
Delivery pressure	bar	71 / 106 *
Delivery cylinder	Ø mm	200
Delivery cyl. stroke	mm	1400
Strokes / minute		27 / 18 *
Engine power	kW	115
Hopper		RS 900
Capacity	l	approx. 400
Filling height	m	1.3
Transfer tube		S 2015 D
Pressure connection		6"
Control system		Fully hydraulic (VHS)
Weight	kg	4200

\* Values for hydraulic fluid being fed to piston-side.

All data maximum theoretical.

Alterations due to technical progress reserved.  
 Please see quotation for exact serial delivery scope.

## Site example: BSA and stationary boom

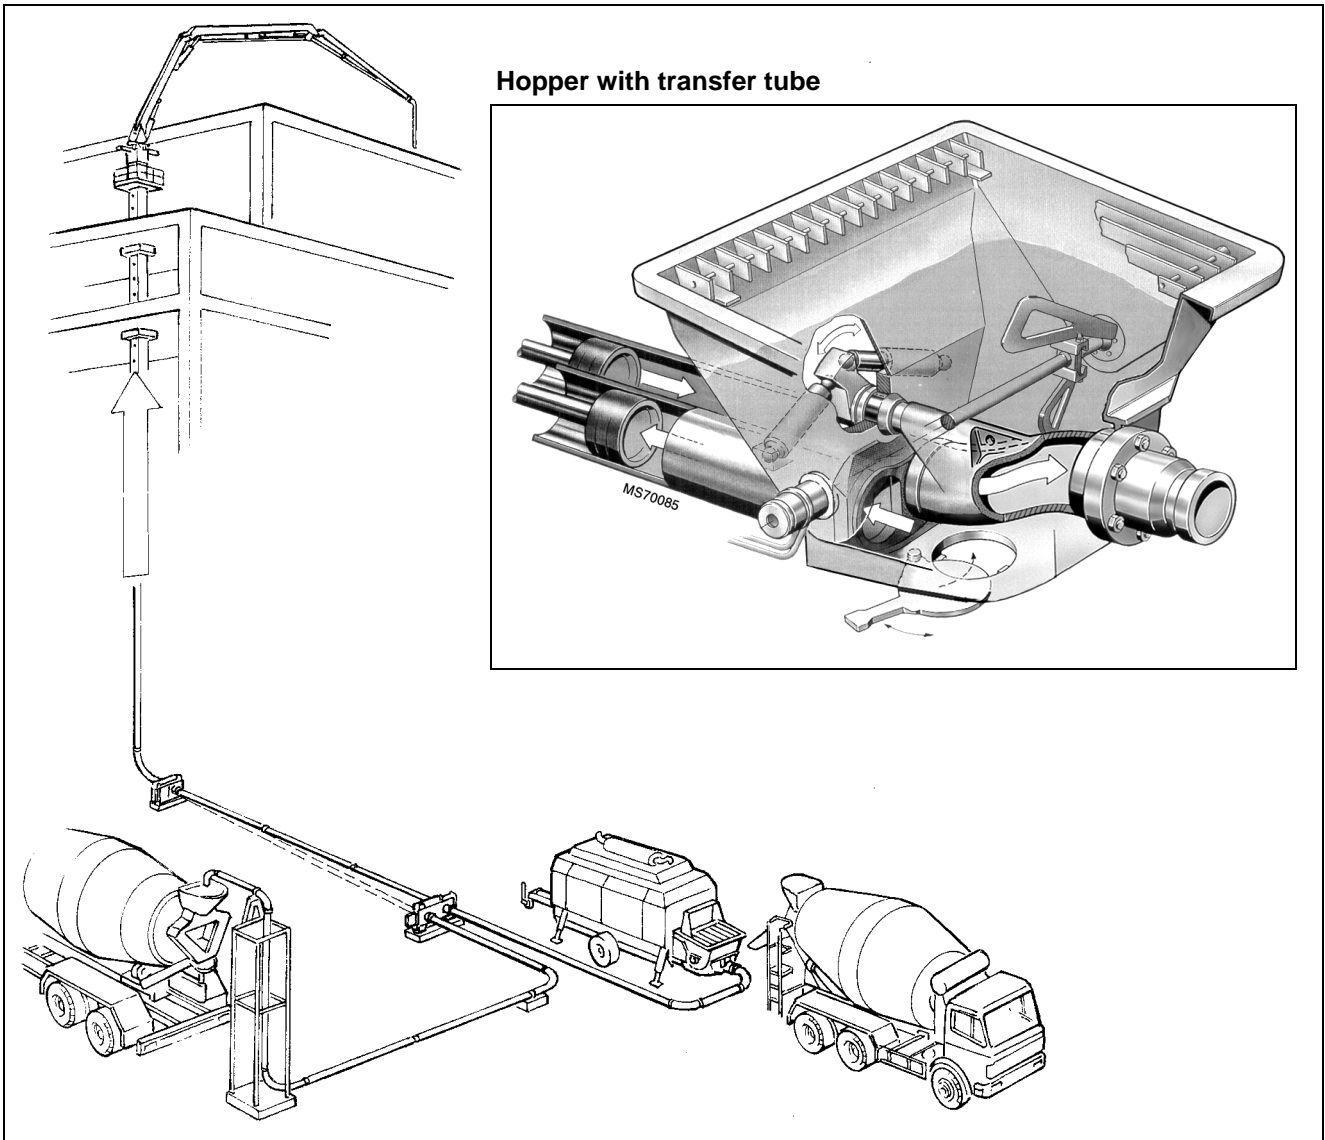

### Delivery scope

- central lubrication strip hopper
- cleaning accessories
- concrete hopper with agitator
- coupling ring (DIN)
- drive diesel, Deutz 115 KW
- grill 70 mm
- operating manuals 2x cert. and spare part lists
- painting: MB 1227 chrome yellow
- remote control with 5m cable
- set of tools
- splash guard
- square outriggers 4x mech. 15°-slanging
- support wheel on towbar
- trailer F 8, can be driven on job site
- transport protection on support wheel

### Optional extras

On request