


# Concrete pump


# BSA 14000 HP

Output up to 200 m<sup>3</sup>/h  
 Delivery pressure up to 260 bar

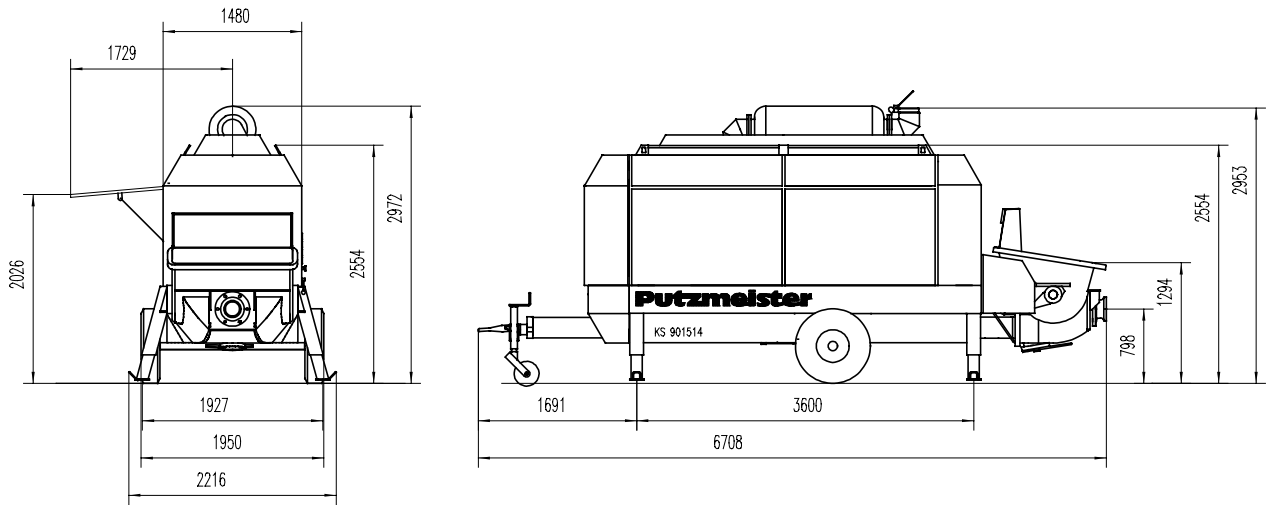

Note: Standard version. Dimensions and weights depend on equipment.

## Performance diagram

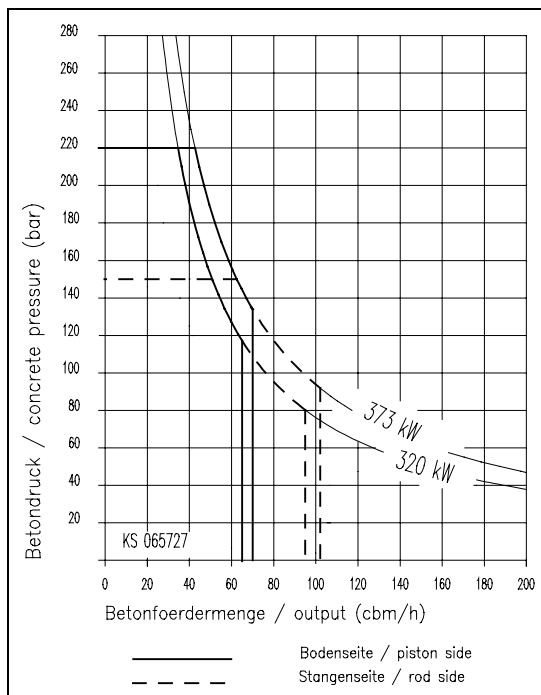

## Technical data for concrete pump

| Model                | BSA               | 14000 HP -D                | 14000 HP -D | 14000 HP -E | 14000 HP -D |
|----------------------|-------------------|----------------------------|-------------|-------------|-------------|
| Material number      |                   | 100807.006                 | 100808.005  | 100809.004  | 100870.004  |
| Output               | m <sup>3</sup> /h | 82/54*                     | 102/70*     | 95/65*      | 200/139*    |
| Delivery pressure    | bar               | 185/260*                   | 150/220*    |             | 79/115*     |
| Delivery cylinder    | ∅ mm              | 180                        | 200         |             | 280         |
| Delivery cyl. stroke | mm                | 2100                       |             |             |             |
| Strokes / minute     |                   | 26 / 17 *                  | 26 / 18 *   | 24 / 17 *   | 26 / 18 *   |
| Engine / motor power | kW                | 373                        | 373         | 320 **      | 373         |
| Hopper               |                   | RS 900HP                   |             |             | RS 900M     |
| Capacity             | l                 | 600                        |             |             | 600         |
| Filling height       | m                 | approx. 1.3                |             |             | approx. 1.3 |
| Transfer tube        |                   | S 1815 D                   | S 2015 D    |             | S 2318      |
| Pressure connection  |                   | 6"                         |             |             | 8"          |
| Control system       |                   | Free-Flow Hydraulics (FFH) |             |             |             |
| Weight               | kg                | 9600                       |             |             | 10000       |


\* Values for hydraulic fluid being fed to piston-side.

\*\* Electric motor with 50 Hz.

All data maximum theoretical.

Alterations due to technical progress reserved.  
 Please see quotation for exact serial delivery scope.

## Site example: BSA and stationary boom

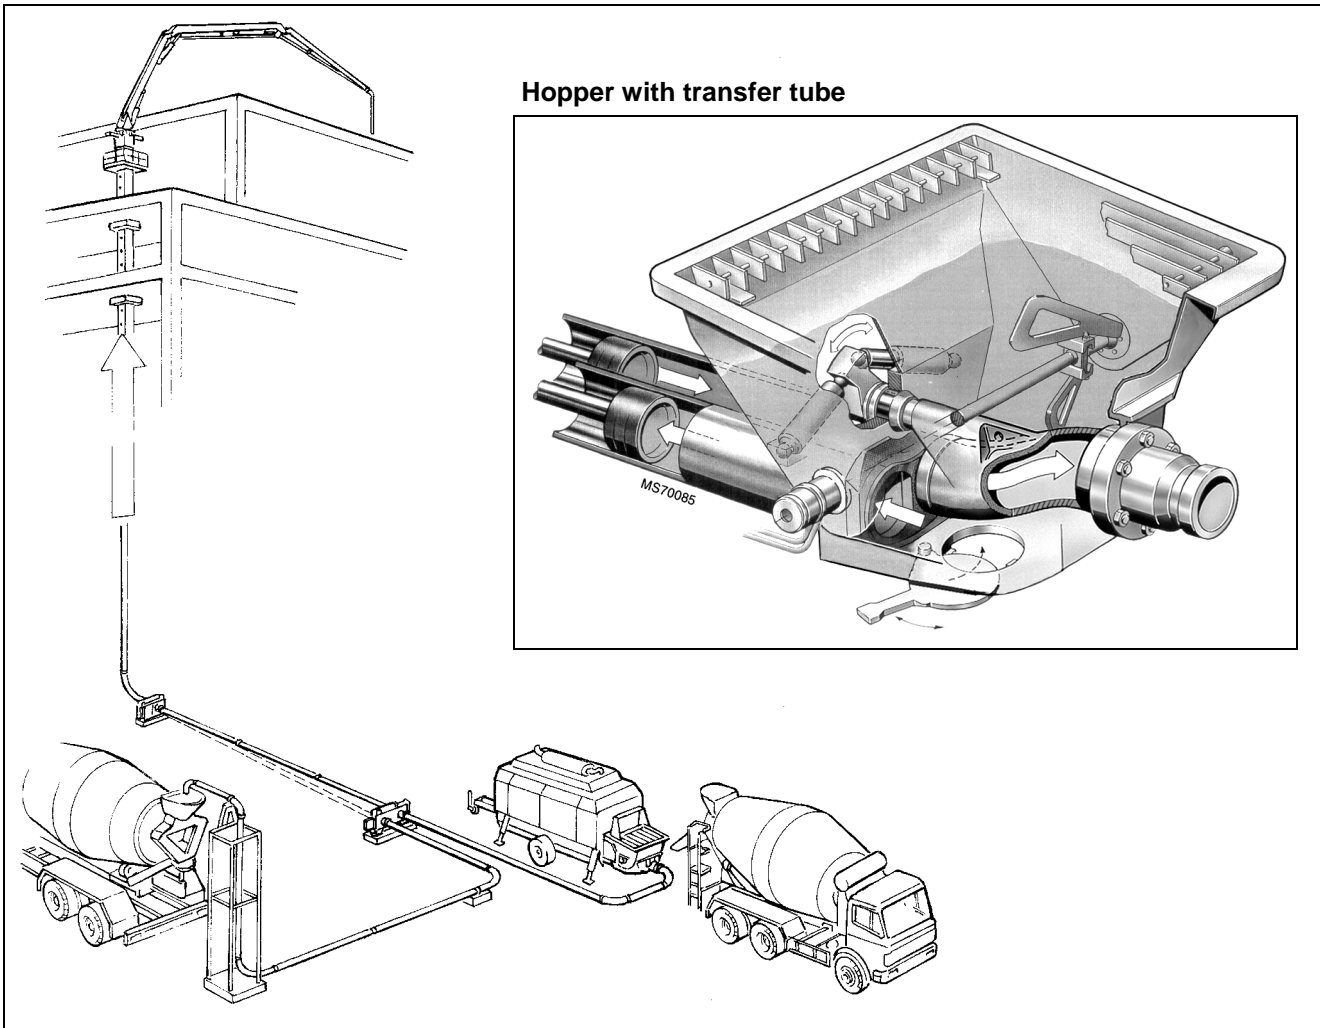

### Delivery scope

- CE-Kit with agitator safety switch off
- cleaning accessories
- concrete hopper with agitator
- coupling ring (DIN)
- drive Diesel, CAT 373 KW (BSA 14000 HP -D)
- drive electric 2x160 KW (BSA 14000 HP -E)
- gate valve connection on pump
- grill 70 mm
- operating manuals 2x cert. and spare part lists
- painting: MB 1227 chrome yellow
- remote control with 5m cable
- set of tools
- set-up foot hydr.
- side flaps 4x
- splash guard
- square outriggers 4x mech. 15°-slanging
- support wheel on towbar
- trailer F 8, can be driven on job site
- transport protection on support wheel
- wear parts, hard metal

### Optional extras

On request